



EcoPro

The standard pump for sophisticated industrial applications

- ▲ Powerful, adaptable, durable
- ▲ Simple dosing quantity adjustment by means of rotary knob
- ▲ Clear display of operating states via multicolor LEDs
- ▲ Adjustable metering range up to 1:100
- ▲ Two different metering modes selectable (e.g. for adaptation to difficult suction conditions)
- ▲ Release input
- ▲ Variable arrangement of control panel and mounting bracket



Technical data

Features: Settings: on/off, test, viscosity high/low, metering range up to 1:100
 LEDs: operation, viscosity high/low, alarm
 Inputs: release

Material: Pump head / valves: PP, PVDF
 Valve balls: Ceramics, PTFE, stainless steel
 O-rings: FKM, EPDM, PTFE, FFPM (Kalrez)




General data:

Pump type		5	11	30	50	120
Pump capacity:	l/h	0.05 - 5	0.11 - 11	0.3 - 30	0.5 - 50	1.2 - 120
max. metering back pressure	bar	10	10	3	10	3
Connection thread		3/8"	3/8"	5/8"	5/8"	1 1/4"
Reproducibility		+/- 3%				
max. suction height	m	2				
max. metering frequency	1/min	171	176	166	162	165
Ambient temperature	°C	2 - 45				
Power supply	V	100 - 240 V 50/60 Hz				
Safety type		IP 65				
Certificates		CE, UL, CSA				

Variable structure



Upgrade from **EcoPro** to **EcoAdd**

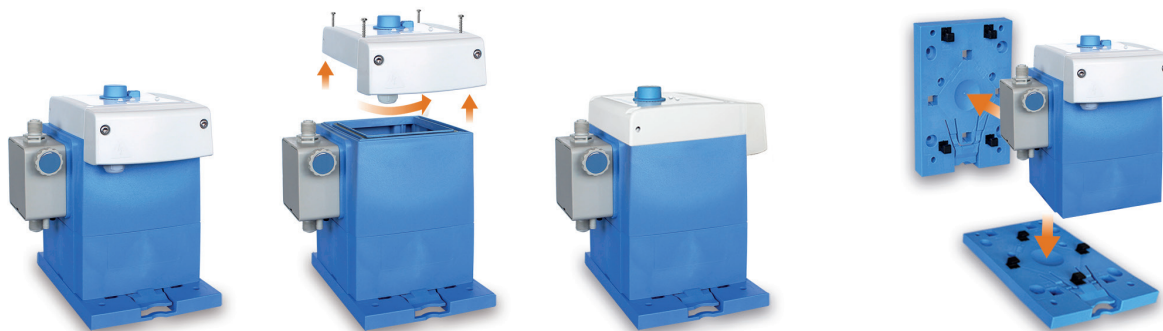

Flexible installation

Ecolab Engineering GmbH

Postfach 1164 83309 Siegsdorf
 Phone +49 8662 61 0
 engineering-mailbox@ecolab.com
 www.ecolab-engineering.com

